



KEN LIFE SCIENCE IQ5M GLASSWARE WASHER

Intelligent Quality

THE FLEXI SHELF SYSTEM

- ✓ Easy to use
- ✓ Easy to service
- ✓ Easy to choose

KEN HYGIENE SYSTEMS has developed a new range of Glassware Washers for the LIFE SCIENCE industry.

The IQ series is a modular built range that meets all relevant standards such as ISO 15883, UL to name a few.

The IQ5M has a small physical footprint, and it is designed to leave a small environmental, operational and financial footprint.


The IQ5M is available with one manual drop down door. The manual door allow for loading directly on the door.

The shelf system is completely flexible and can be modified to get full advantage of the chamber size.

This innovative system enables users to effortlessly pull out the shelves for loading and unloading on the top, middle and bottom level with just one simple movement, enhancing convenience and workflow efficiency.


The elegant design provides a smooth surface in tempered glass that is easy to clean. Furthermore, the IQ5M is easy to operate by touch panel with a swipe function, showing all relevant information of the program needed by the operators.

All data from the IQ5M are fully exchangeable with common computer systems.

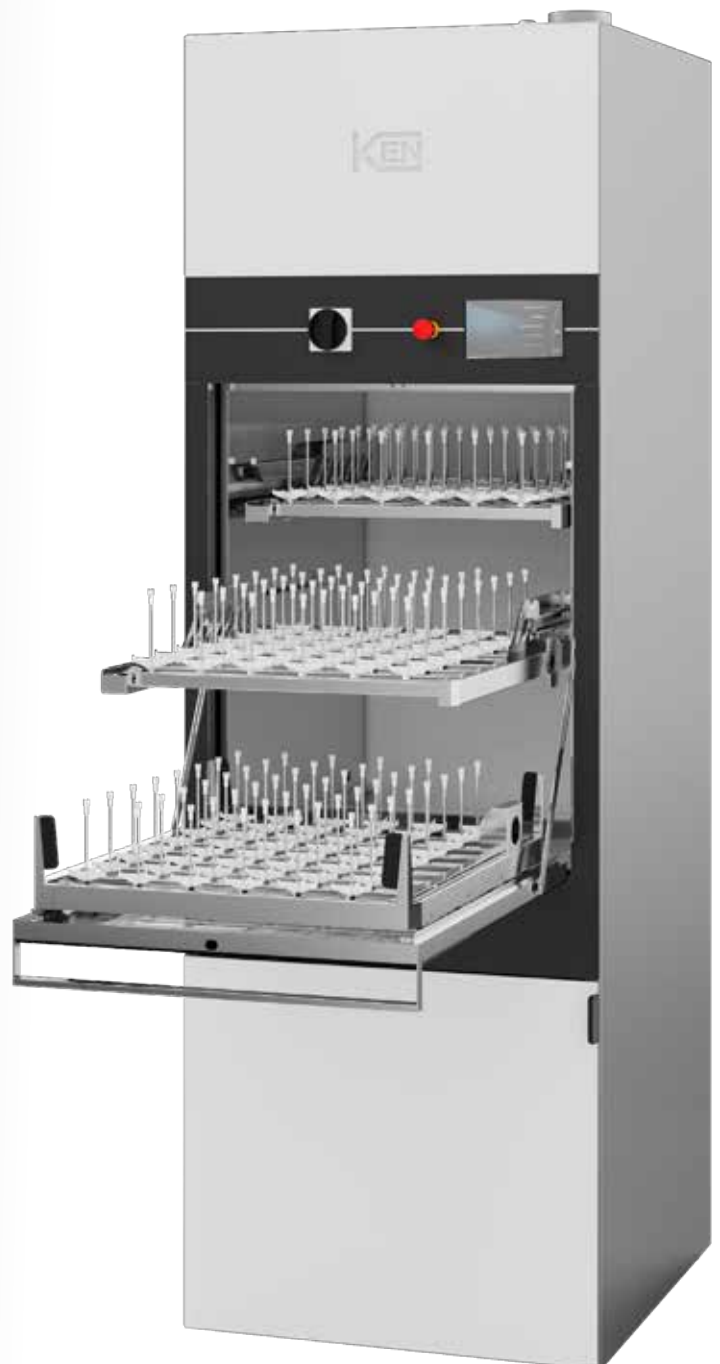

KEN LIFE SCIENCE GLASSWARE WASHER IQ5M

LIFE SCIENCE

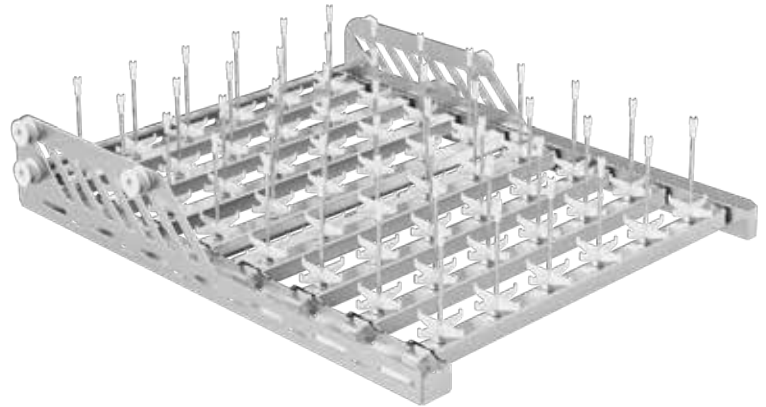

Advantages:

Environment

- Low energy costs
- Low noise level
- Low chemical usage
- Low water consumption

User-friendly design

- Service access from the front
- Great flexibility
- Wide range of racks and other equipment
- Maintenance friendly surface

Hygiene safety

- EN 62366 tested
- EN ISO 15883-1-2-5

Validation of all processes

- Open programs structure
- Full process validation
- Remote service access

Description	Values
Outer dimensions	H: 1985 x W: 662 x D: 712 mm
Operative volume / dimensions, wash chamber	H: 690 x W: 550 x D: 610 mm
Weight excl./incl. packaging	303 / 363 kg
Operative volume, wash chamber	231 L
Total volume, wash chamber	279 L
Capacity, baskets	12 DIN-baskets 480 x 250 x 50 mm
Cycle time, standard	35-45 min
Exhaust connections	ø100 mm 250 m³/h
Water connections	2 x 3/4" (3rd is optional)
Cold water	200-800 kPa, ≥ 15 L/min, 5-30°C, 0-30° dH
Hot water	200-800 kPa, ≥ 15 L/min, 30-70°C, 0-3° dH
Deminerlized / RO water	200-800 kPa, ≥ 15 L/min, 5-70°C, 3-200 µS/cm
Sound pressure level	
Washing	<53 dB (A)
Drying	<55 dB (A)
Water consumption per phase	Approx. 12-15 L (with standard 5-level rack)
Power supply options	3x200-480V AC + N + PE, 50/60 Hz 7-13 kW
Programs available	8 standard + 32 optional
Drain	ø50 mm, min flow requirements: 115 L/min

